


Boiler Tube Sheets

ISA boards can be used to replace ram or castable with needles packed around tubes. ISA boards provide superior installation capabilities. Boards can be preshrunk and machined to tight tolerances. Boards are processed on the CNC by section then layered to cover seams between layers.

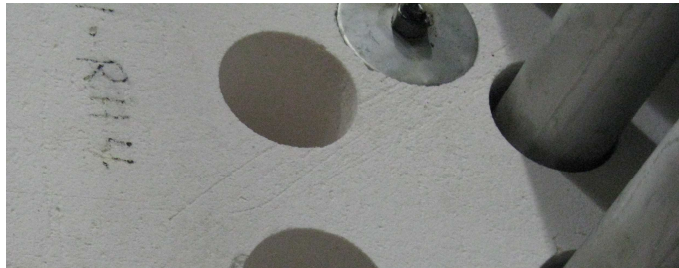

A three layer design consists of one layer of 2600° board at 2" thick for the hot face and 2 layers of 2300° board at 3" thick for backing.

The Board is anchored to end plates or can be held in place by sleeves around tubes. Temperature rating of boards range from 2300° F to 3000° F and in thicknesses from 1/4" to 8".

Special coatings can be applied to resist moisture while maintaining structural integrity. Our products function well in most atmospheres.

Call, fax or email your request today!



**INSULATION
SPECIALTIES OF
AMERICA, INC.**

INSULATION SPECIALTIES OF AMERICA

1095 Kabert Drive, Wanatah, IN 46392

Phone: 219-733-2502

Fax: 219-733-2300

E-mail: info@insulationspecialties.com

Mike Misch—Sales Engineer

This information is presented for general reference and should not be used for specification purposes—no warranty is expressed or implied.