


Burner Blocks with SiC liners

Blocks were designed by a customer with North American 4422 burners.

Burners are non re-circulating with a 2100° F Operating Temperature.




Previous blocks were castable refractory lasting 9 to 12 months, and were much heavier and difficult to install.



The 2300° Vacuum Formed blocks are lighter in weight and outperform castable blocks with a 18+ month service and continuing to perform.

SiC liner provides superior erosion resistance.

ISA can provide blocks with or without liners.

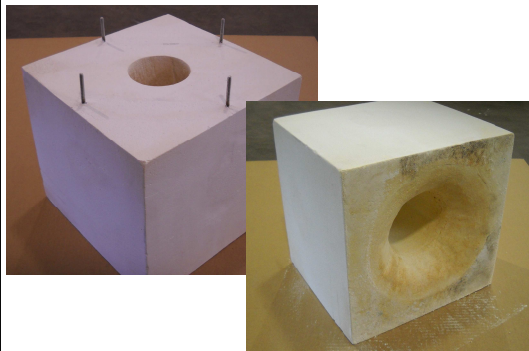

Also pictured are large furnace blocks for temperatures up to 2600° F.

ISA can provide blocks for furnaces up to 3000° F.

Call, fax or email your request today!



INSULATION SPECIALTIES OF AMERICA

1095 Kabert Drive, Wanatah, IN 46392

Phone: 219-733-2502

Fax: 219-733-2300

E-mail: info@insulationspecialties.com

Mike Misch—Sales Engineer

This information is presented for general reference and should not be used for specification purposes—no warranty is expressed or implied.